



**YITAI**

Since 1990

5000 Square Meters Workshop



4000 Machines Annual Output

30 Office Staff, 30 Technicians, 80 Workers

80 Countries Have YITAI Machines Running

7 Oversea Sales Branches  
India, Bangladesh, Indonesia, Mexico, Argentina, Colombia, Peru

More Agents Wanted...

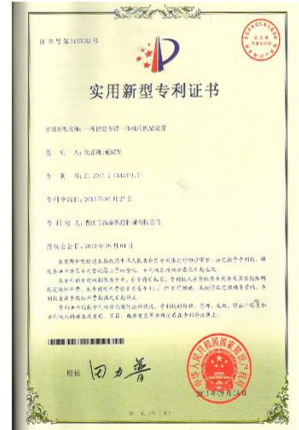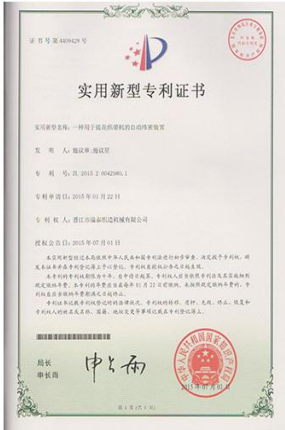


# YITAI HIGH SPEED BRAIDING MACHINES

MODEL	HEADS	SPINDLES	BOBBIN SIZE	MAX SPEED OF LEAF TOOTH	MOTOR	CARRIER TYPE
YTS 4/16	4	16	48*140MM	360	1 HP	A,B
YTS 8/12	8	12	48*140MM	360	1 HP	A,B
YTS 6/16	6	16	48*140MM	360	1 HP	A,B
YTS 2/24	2	24	48*140MM	360	1 HP	A,B

YTS 2/32	2	32	48*140MM	360	1 HP	A,B
YTS 2/40	2	40	48*140MM	360	1 HP	A,B
YTS 2/48	2	48	48*140MM	360	2 HP	A,B
YTS8/8	8	8	48*140MM	360	1 HP	A,B
YTS8/9	8	9	48*140MM	360	1 HP	A,B
YTS4/12	4	12	48*140MM	360	1 HP	A,B
YTS 4/13	4	13	48*140MM	360	1 HP	A,B
YTS 8/13	8	13	48*140MM	360	1 HP	A,B
YTS 4/17	4	17	48*140MM	360	1 HP	A,B
YTS 2/21	2	21	48*140MM	360	1 HP	A,B
YTS 2/25	2	25	48*140MM	360	1 HP	A,B
YTS 2/29	2	29	48*140MM	360	1 HP	A,B
YTS 2/33	2	33	48*140MM	360	1 HP	A,B
YTS 2/41	2	41	48*140MM	360	2 HP	A,B
YTS 2/46	2	46	48*140MM	360	1 HP	A,B
YTS -B 2/16	2	16	70*210MM	360	1 HP	A,B
YTS-B 4/9	4	9	70*210MM	360	1 HP	A,B
YTS-B 2/13	2	13	70*210MM	360	1 HP	A,B
YTS-B 2/17	2	17	70*210MM	360	2HP	A,B
YTS-B 2/21	2	21	70*210MM	360	2HP	A,B
YTS-B 2/25	2	25	70*210MM	360	2HP	A,B
YTS-B 2/29	2	29	70*210MM	360	2HP	A,B
YTS-B 2/24	1	40	70*210MM	360	2HP	A,B

This machine has below features:

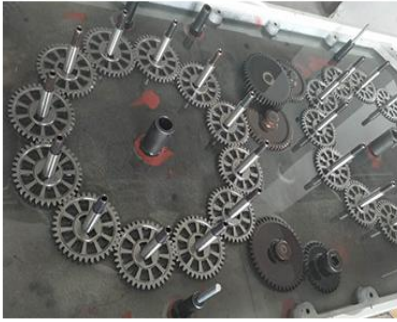

### The base

Is with aging treatment for half a year, than it's not easy to be out of shape.



### Material

Material of the board is QT600.



### Well-constructed board

two pieces of the board, easy for installation, and not easy to be out of shape.



### Heat treatment

for the board to increase hardness, and abrasion proof.



### Vane wheels

All vane wheels keep in the same level, to reduce resistance when it's working



### The plastic on the vane wheel

is special plastic, add molybdenum disulphide grease, abrasion proof and lubrication.

Applications:

Making a variety of shoelaces, high-tensile strength belt, finishing net thread, fishing line, trail rope, decorative ribbons, elastic sporting accessories, curtain accessories etc.



Bobbin size:

standard bobbin size:48\*140mm/ 48\*195mm

big bobbin size:70\*210mm

Running speed:



The converter can be settled as the maximum 60,then the motor running speed as 450 RPM, and lead to 450 RPM for spindle.

Braiding tape size:

YTS 4/16-----DIA-----1.5mm~11mm  
 YTS 2/24-----DIA----- 2.5 mm ~15 mm  
 YTS 2/32-----DIA---- 4.0mm ~ 17mm  
 YTS 2/40-----DIA---- 4.0mm ~ 18mm  
 YTS 2/48-----DIA---- 4.0mm ~ 25mm  
 YTS 4/13-----W-----2.0mm~9.0mm  
 YTS4/17-----W-----2.0mm~13.0mm  
 YTS 8/9 -----W-----1.5mm~5.0mm  
 YTS 2/33-----W-----4.0mm~16.0mm  
 YTS 2/25(21,29 Spindles)-----W-----3.0mm~13.0mm  
 YTS 2/41-----W-----7.0mm~18.0mm  
 Big bobbin braiding machine tape size above 11mm

**Productivity per minute:**

Single spindles: production range 1.5m ~1.8m/min/head  
 Double spindles: production range 1.2m ~1.5m/min/head  
 Double spindles, non-elastic production range is from  
 60cm~80cm/min/head





**YITAI reserves all the rights of final explanations.**